
Vizier DB - WebUser Interface Documentation

Release 1.0

New York University

Aug 07, 2020

Contents

1	Contents	3
1.1	Install and Run	3
1.2	Getting Started	5
2	Links	13
3	Indices and tables	15

Vizier is a new powerful tool to streamline the data curation process. Data curation (also known as data preparation, wrangling, or cleaning) is a critical stage in data science in which raw data is structured, validated, and repaired. Data validation and repair establish trust in analytical results, while appropriate structuring streamlines analytics.

Vizier makes it easier and faster to explore and analyze raw data by combining a simple notebook interface with spreadsheet views of your data. Powerful back-end tools that track changes, edits, and the effects of automation. These forms of provenance capture both parts of the exploratory curation process - how the cleaning workflows evolve, and how the data changes over time.

Vizier is a collaboration between the **University at Buffalo**, **New York University**, and the **Illinois Institute of Technology**.

1.1 Install and Run

Before installing Vizier DB Web UI, you should install VizierDB - Web API. The Web API is the backend that provides the API that is used by the Vizier DB Web UI.

1.1.1 Install VizierDB - Web API

Installation is still a bit labor intensive. The following steps seem to work for now (requires [Anaconda](#)). If you want to use Mimir modules within your curation workflows a local installation of Mimir v0.2 is required. Refer to this [guide for Mimir installation details](#).

Python Environment

To setup the Python environment clone the repository and run the following commands:

```
>>> git clone https://github.com/VizierDB/web-api.git
>>> cd web-api
>>> conda env create -f environment.yml
>>> source activate vizier
>>> pip install git+https://github.com/VizierDB/Vistrails.git
>>> pip install -e .
```

As an alternative the following sequence of steps might also work (e.g., for MacOS):

```
>>> git clone https://github.com/VizierDB/web-api.git
>>> cd web-api
>>> conda create --name vizier pip
>>> source activate vizier
>>> pip install -r requirements.txt
>>> pip install -e .
>>> conda install pyqt=4.11.4=py27_4
```

Configuration

The web server is configured using a configuration file. There are two example configuration files in the `config` directory (depending on whether including Mimir `config-mimir.yaml` or not `config-default.yaml`).

The configuration parameters are:

api

- *server_url*: Url of the server (e.g., `http://localhost`)
- *server_port*: Server port (e.g., 5000)
- *app_path*: Application path for Web API (e.g., `/vizier-db/api/v1`)
- *app_base_url*: Concatenation of *server_url*, *server_port* and *app_path*
- *doc_url*: Url to API documentation

fileserver

- *directory*: Path to base directory for file server
- *max_file_size*: Maximum size for file uploads

engines

- *identifier*: Engine type (i.e., DEFAULT or MIMIR)
- *name*: Engine printable name
- *description*: Descriptive text for engine
- *datastore*: - directory: Base directory for data store

viztrails

- *directory*: Base directory for storing viztrail information and meta data

name: Web Service name

debug: Flag indicating whether server is started in debug mode

logs: Path to log directory

When the Web server starts it first looks for the configuration file that is reference in the environment variable `VIZIERSERVER_CONFIG`. If the variable is not set the server looks for a file `config.yaml` in the current working directory.

Note that there is a `config.yaml` file in the working directory of the server that can be used for development mode.

Run Server

After adjusting the server configuration the server is run using the following command:

```
>>> cd vizier
>>> python server.py
```

Make sure that the conda environment has been activated using `source activate vizier`.

If using Mimir the gateway server should be started before running the web server.

API Documentation

For development it can be helpful to have a local copy of the API documentation. The [repository README](#) contains information on how to install the UI locally.

1.1.2 Install VizierDB - Web UI

Start by cloning the repository and switching to the app directory.

```
>>> git clone https://github.com/VizierDB/web-ui.git
>>> cd web-ui
```

Inside the app directory, you can run several commands:

Install build dependencies

```
>>> yarn install
```

Start the development server

```
>>> yarn start
```

Bundles the app into static files for production

```
>>> yarn build
```

Additional Commands

Starts the test runner.

```
>>> yarn test
```

Remove this tool and copies build dependencies, configuration files and scripts into the app directory. If you do this, you can't go back!

```
>>> yarn eject
```

Configuration

The UI app connects to the Web API server. The Url for the server is currently hard-coded in the file `public/env.js`. Before running `yarn start` adjust the Url to point to a running Web API server. By default a local server running on port 5000 is used.


1.2 Getting Started

Vizier organizes data curation workflows into projects.


- Start by selecting or creating a new project under the Projects Tab.
- If the data that you want to clean is currently stored in CSV files, these files have to be uploaded to the file server. You can upload your data files under the Files Tab.

1.2.1 Step 1

Create Project

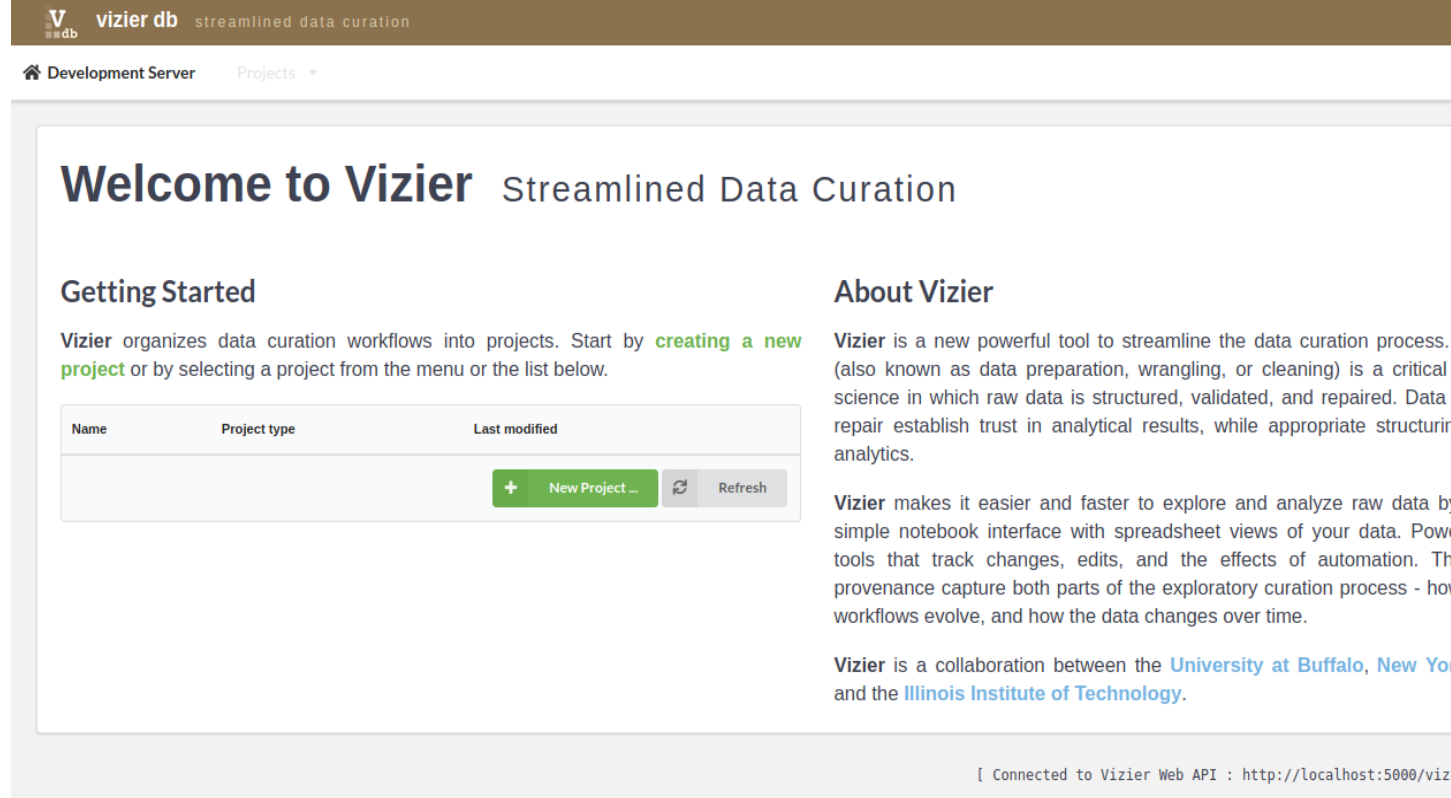

Begin by adding a project on the Vizier page (initial page), shown in the figure above, by clicking on the **New Projects ...** button.

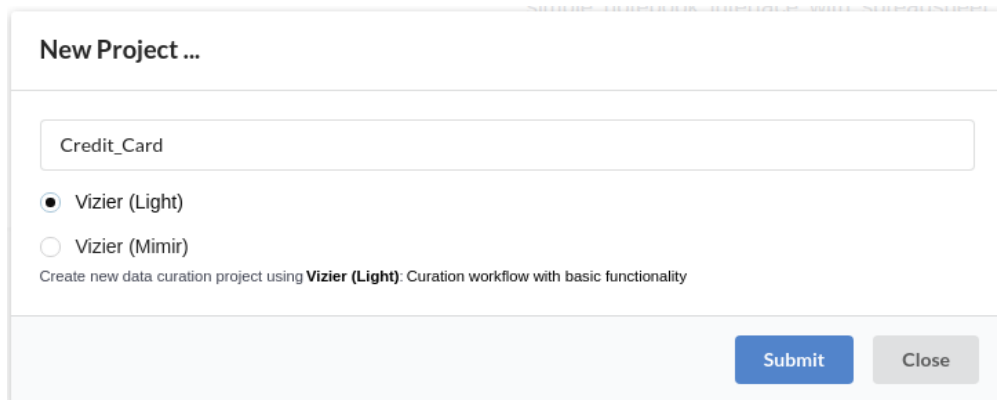

On the New Project... dialog shown in figure above, enter the name of the project you would like to create, for example **credit_card**, and click on **Submit** button. You should now see the new project you added in the list of projects as shown below.

The screenshot shows the Vizier web interface. At the top, there is a navigation bar with the Vizier logo and the text 'vizier db streamlined data curation'. Below the navigation bar, there are links for 'Development Server' and a dropdown menu for 'Projects'. The main content area features a large heading 'Welcome to Vizier Streamlined Data Curation'. Underneath, there are two columns: 'Getting Started' and 'About Vizier'. The 'Getting Started' section contains a paragraph explaining that Vizier organizes data curation workflows into projects and provides instructions on how to create a new project or select an existing one. Below this text is a table listing projects. The table has three columns: 'Name', 'Project type', and 'Last modified'. A single project is listed: 'Credit_Card' with 'Vizier (Light)' as the project type and '05-Jul-2018 21:37:25' as the last modified date. Below the table are two buttons: a green '+ New Project ...' button and a grey 'Refresh' button. The 'About Vizier' section contains a paragraph describing Vizier as a powerful tool for streamlining data curation and another paragraph explaining that it makes it easier to explore and analyze raw data. At the bottom right of the page, there is a status bar indicating the connection to the Vizier Web API.

Name	Project type	Last modified
Credit_Card	Vizier (Light)	05-Jul-2018 21:37:25

[Connected to Vizier Web API : http://localhost:5000/viz

Once project is added click on project name in the list of projects to data curation.

1.2.2 Step 2


Load Dataset

Continuing with our example of the **Credit_Card** project, we show here the methods of uploading data.


First, select one project from the list of projects, for example, **credit_card** project by clicking on the name project.

Name	Project type	Last modified
Credit_Card	Vizier (Light)	05-Jul-2018 21:53:46


Once you are inside the project, load the data by clicking in the sign +.

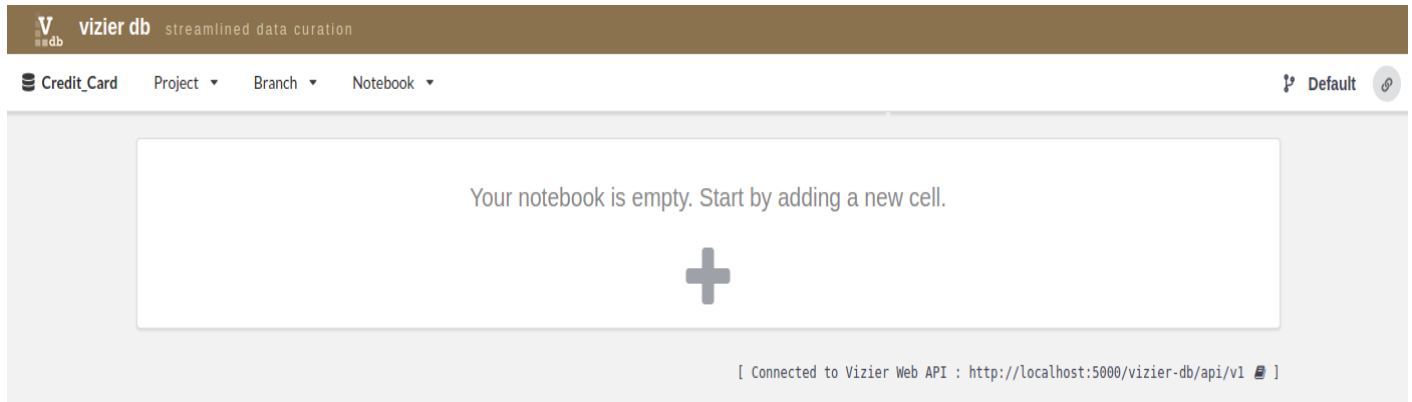


Then, go to the column **DATASET**, and click on **Load Dataset**

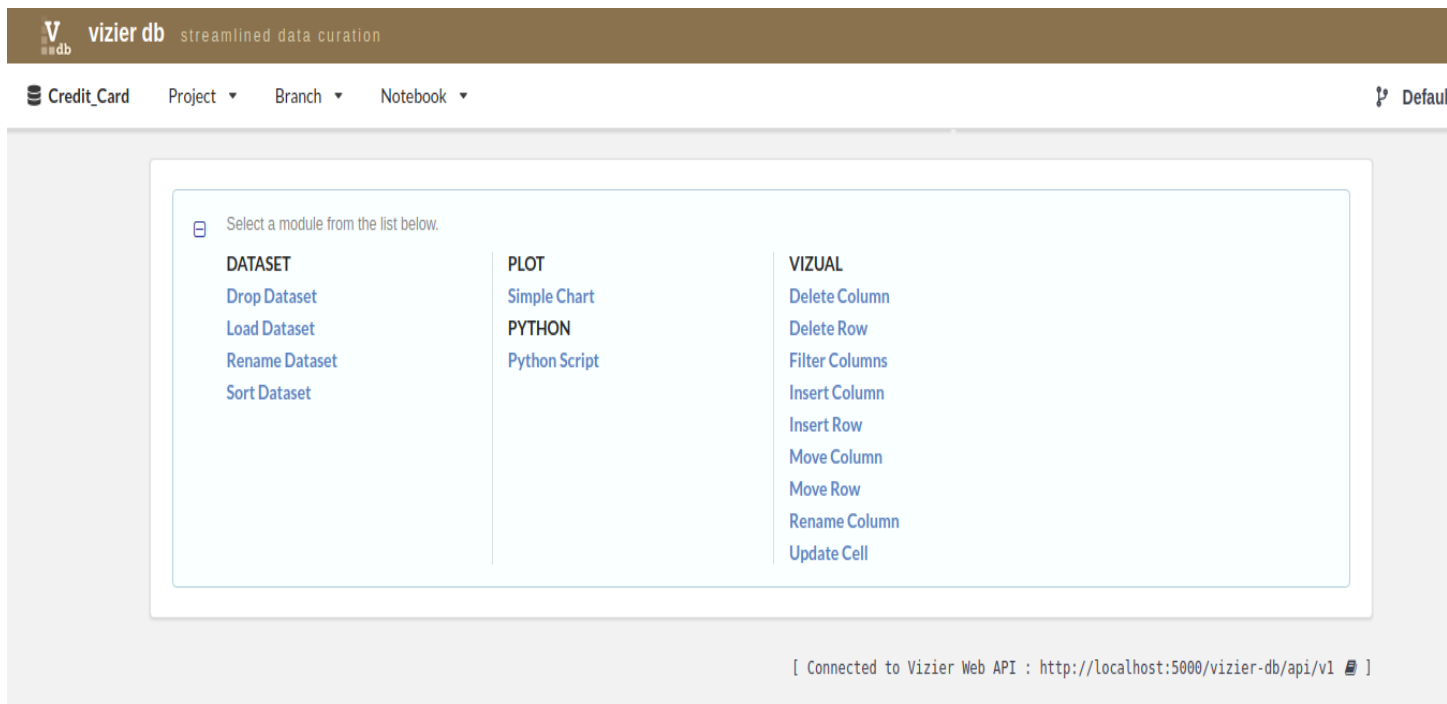


Then, upload the data set. You have to provide the data set name and the source file.

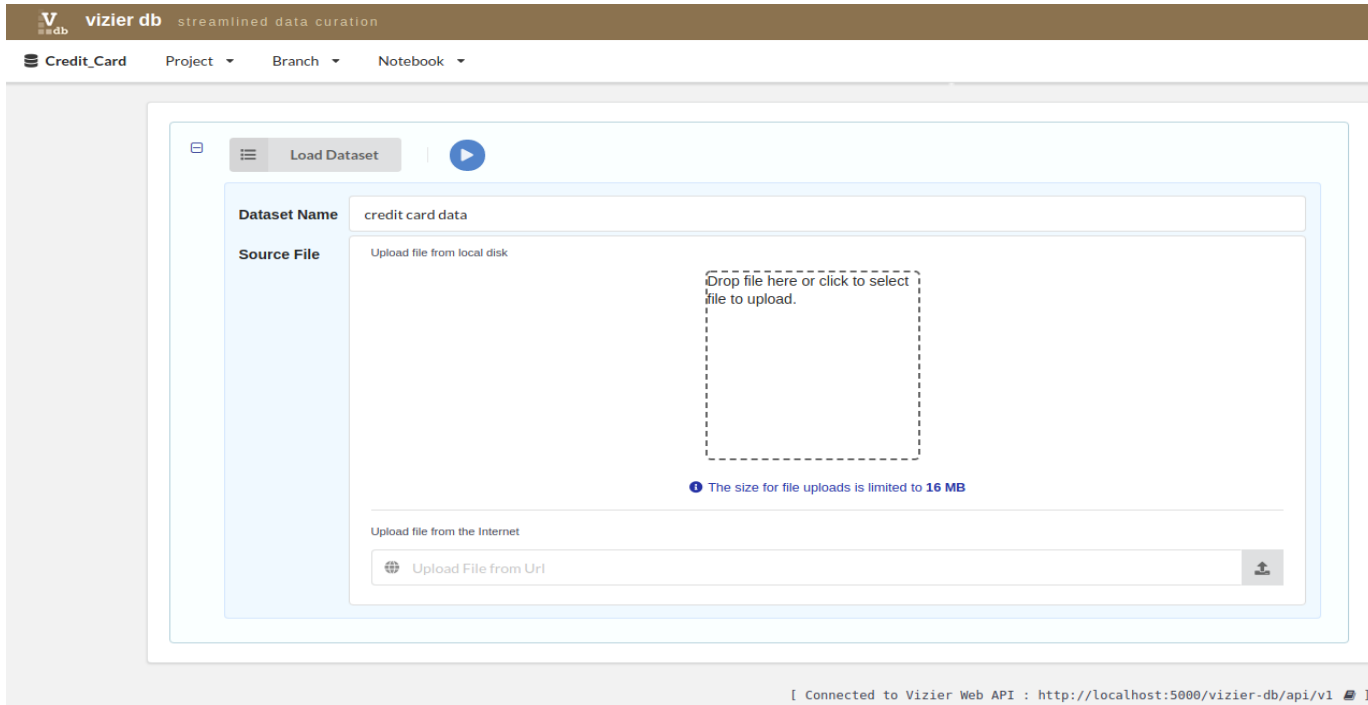

For example, we entered **credit card data** as the name of the dataset for that project and selected ccard.csv dataset, then, click on the blue **play** icon.

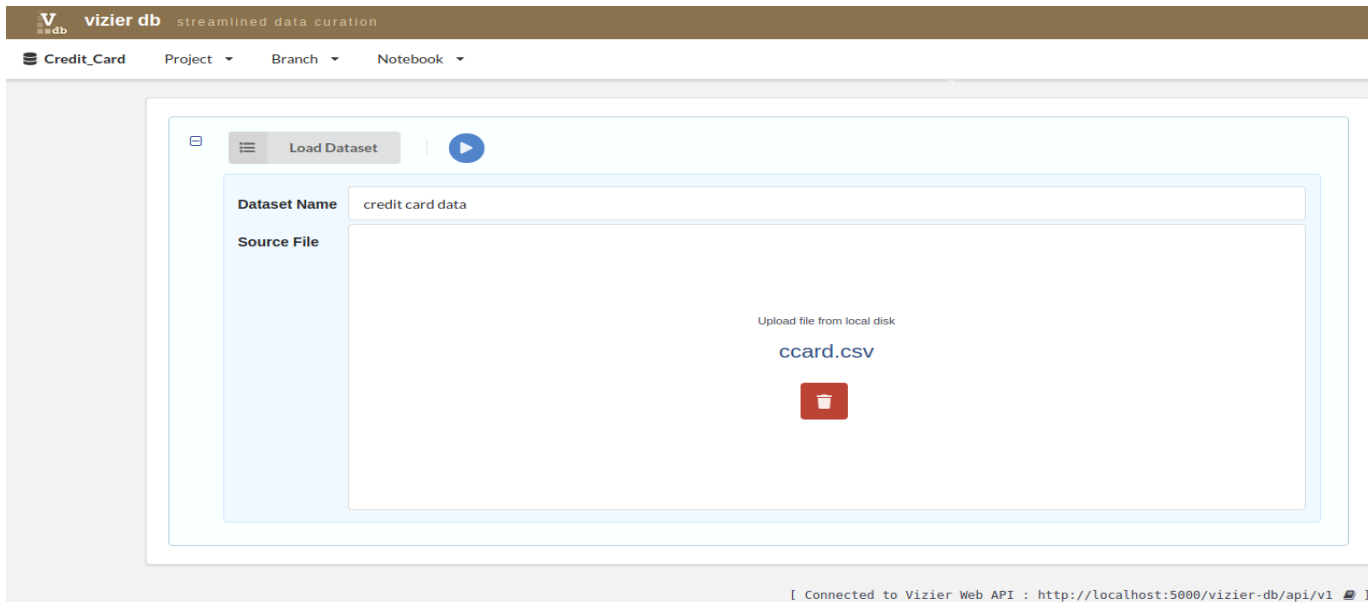

After loading the **credit card dataset**, we can start to explore and curate our data.

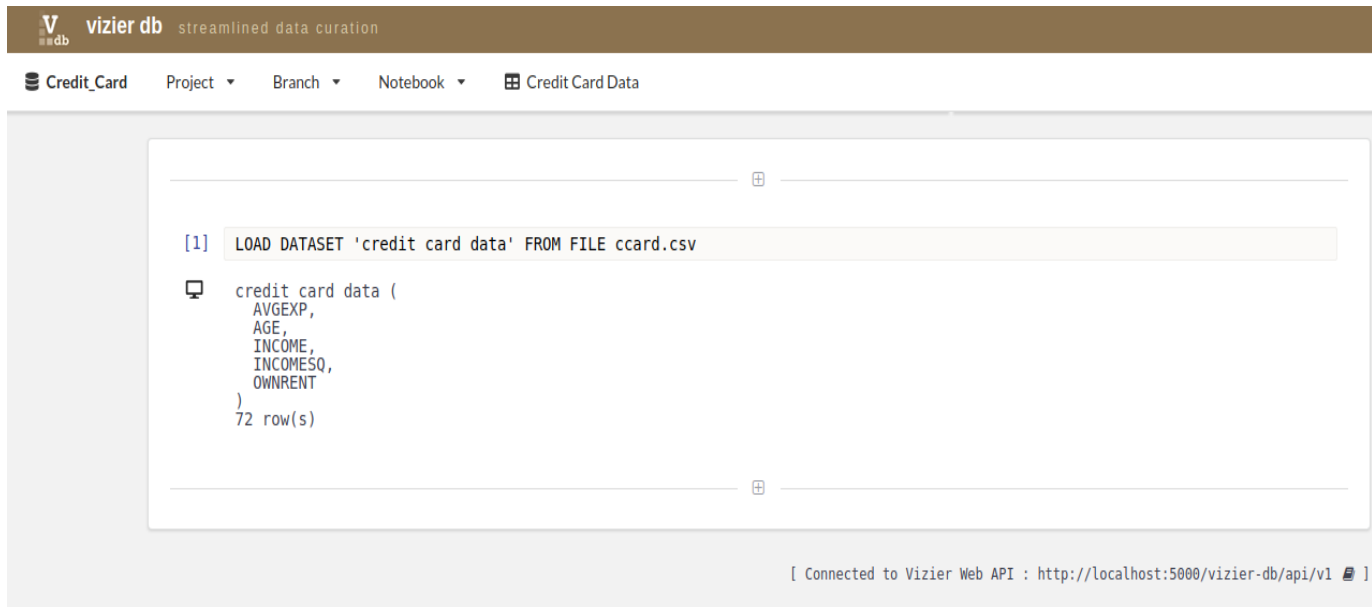

1.2.3 Step 3

Spreadsheet Views

Vizier makes it easier and faster to explore and analyze raw data by combining a simple notebook interface with spreadsheet views of your data. Powerful back-end tools that track changes, edits, and the effects of automation. These forms of provenance capture both parts of the exploratory curation process - how the cleaning workflows evolve, and how the data changes over time. To access the spreadsheet of our Credit Card project just go under the **Credit Card Data** Tab.

The screenshot shows the Vizier DB interface with a data table titled 'credit card data'. The table has five columns: AVGEXP, AGE, INCOME, INCOMESQ, and OWNRENT. The data is presented in a grid with 25 rows. Below the table are navigation controls including arrows and icons for download and share.

	AVGEXP	AGE	INCOME	INCOMESQ	OWNRENT
0	124.98	38	4.52	20.4304	1
1	9.85	33	2.42	5.8564	0
2	15	34	4.5	20.25	1
3	137.87	31	2.54	6.4516	0
4	546.5	32	9.79	95.8441	1
5	92	23	2.5	6.25	0
6	40.83	28	3.96	15.6816	0
7	150.79	29	2.37	5.6169	1
8	777.82	37	3.8	14.44	1
9	52.58	28	3.2	10.24	0
10	256.66	31	3.95	15.6025	1
11	78.87	29	2.45	6.0025	1
12	42.62	35	1.91	3.6481	1
13	335.43	41	3.2	10.24	1
14	248.72	40	4	16	1
15	548.03	40	10	100	1
16	43.34	35	2.35	5.5225	1
17	218.52	34	2	4	1
18	170.64	36	4	16	0
19	37.58	43	5.14	26.4196	1
20	502.2	30	4.51	20.3401	0
21	73.18	22	1.5	2.25	0
22	1532.77	40	5.5	30.25	1
23	42.69	22	2.03	4.1209	0
24	417.83	29	3.2	10.24	0

1.2.4 Step 4

Chart Views

Vizier provides five types of chart: Simple bar chart, group bar chart, line chart, area chart and scatter plot. To create a chart, user have to select a module **Plot>>Simple Chart** from the list below.

Select a module from the list below.

<p>DATASET</p> <ul style="list-style-type: none"> Drop Dataset Load Dataset Rename Dataset Sort Dataset 	<p>PLOT</p> <ul style="list-style-type: none"> Simple Chart <p>PYTHON</p> <ul style="list-style-type: none"> Python Script 	<p>VIZUAL</p> <ul style="list-style-type: none"> Delete Column Delete Row Filter Columns Insert Column Insert Row Move Column Move Row Rename Column Update Cell
--	--	--

Then, fill the form and click on the blue **play** icon.

The screenshot shows the Vizier DB interface with a notebook containing a SQL query and a chart configuration panel.

```
[1] LOAD DATASET 'credit card data' FROM FILE ccard.csv
```

```
credit card data (
  AVGEXP,
  AGE,
  INCOME,
  INCOMESQ,
  OWNRENT
)
72 row(s)
```

[2] Simple Chart

Chart Name: Age-Income

Dataset: credit card data

Data Series	Range	Label	Column
	0:1000	Income	INCOME


X-Axis

Column: AGE

Range: 10:80

Chart Type: Bar Chart

To access the Chart view of our Credit Card project just go under the **Age Income** Tab which is the name of the chart.

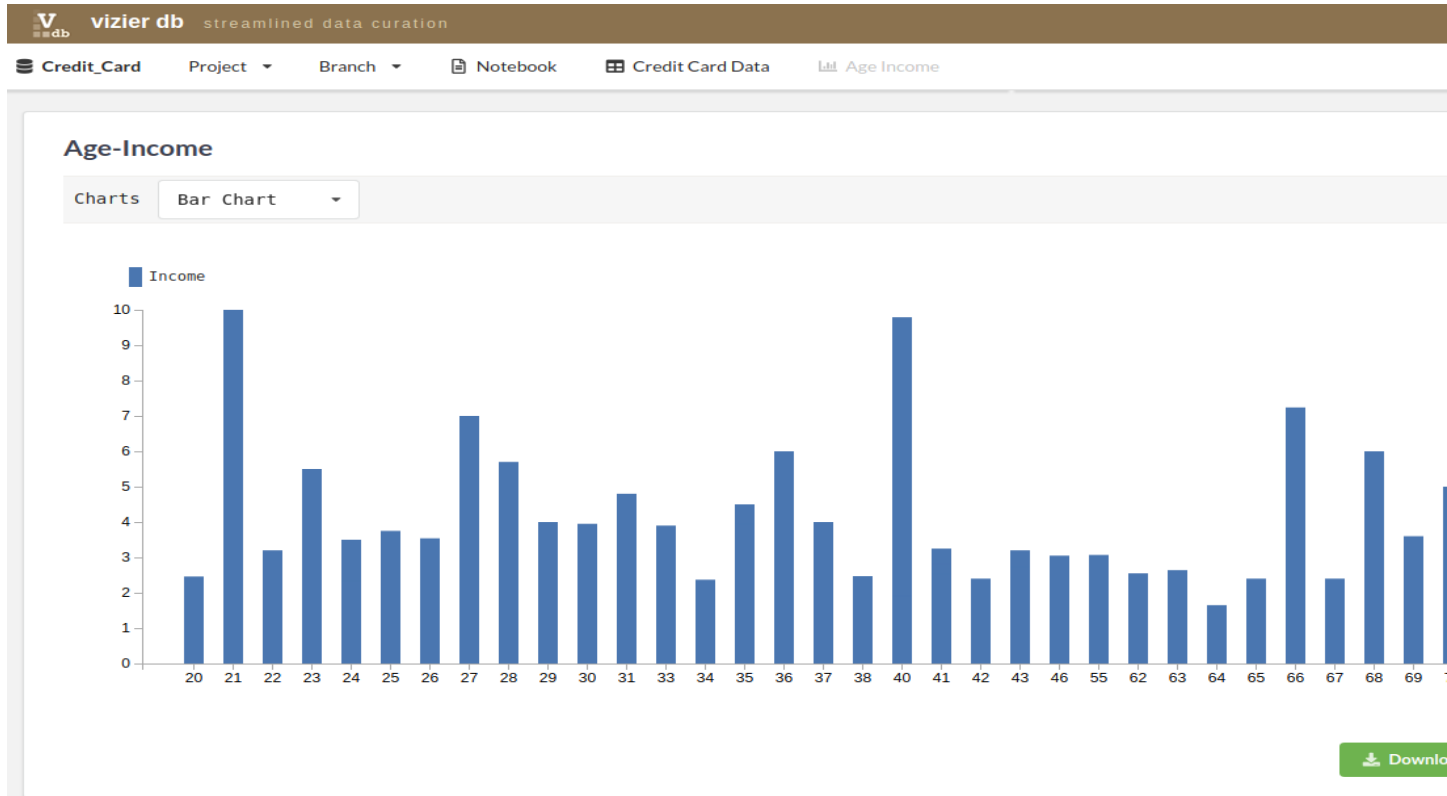

CHAPTER 2

Links

- [GitHub repository](#)

CHAPTER 3

Indices and tables

- `genindex`
- `modindex`
- `search`